NO. SEBUT HARGA : JKR / WPP / Q / 111 / 2026

TAWARAN SEMULA KERJA-KERJA PEMBAIKAN DAN PENGGANTIAN PANEL *SUB MAIN DISTRIBUTION BOARD* (SMDB) DAN *DISTRIBUTION BOARD* (DB) SERTA KERJA-KERJA BERKAITAN DI DEWAN GEMILANG, BLOK SETIA PERKASA 1, KOMPLEKS SETIA PERKASA, PUTRAJAYA.

TARIKH TUTUP : 29 OKTOBER 2026

SYARAT-SYARAT KELAYAKAN

Kontraktor-kontraktor yang berdaftar dengan CIDB


Gred : G1,G2,G3,G4,G5,G6 DAN G7

Kategori : ME

Pengkhususan : E04 dan E11

Pendaftaran kontraktor yang beralamat di Negeri Selangor, Wilayah Persekutuan Kuala Lumpur dan Wilayah Persekutuan Putrajaya

LOKASI BANGUNAN

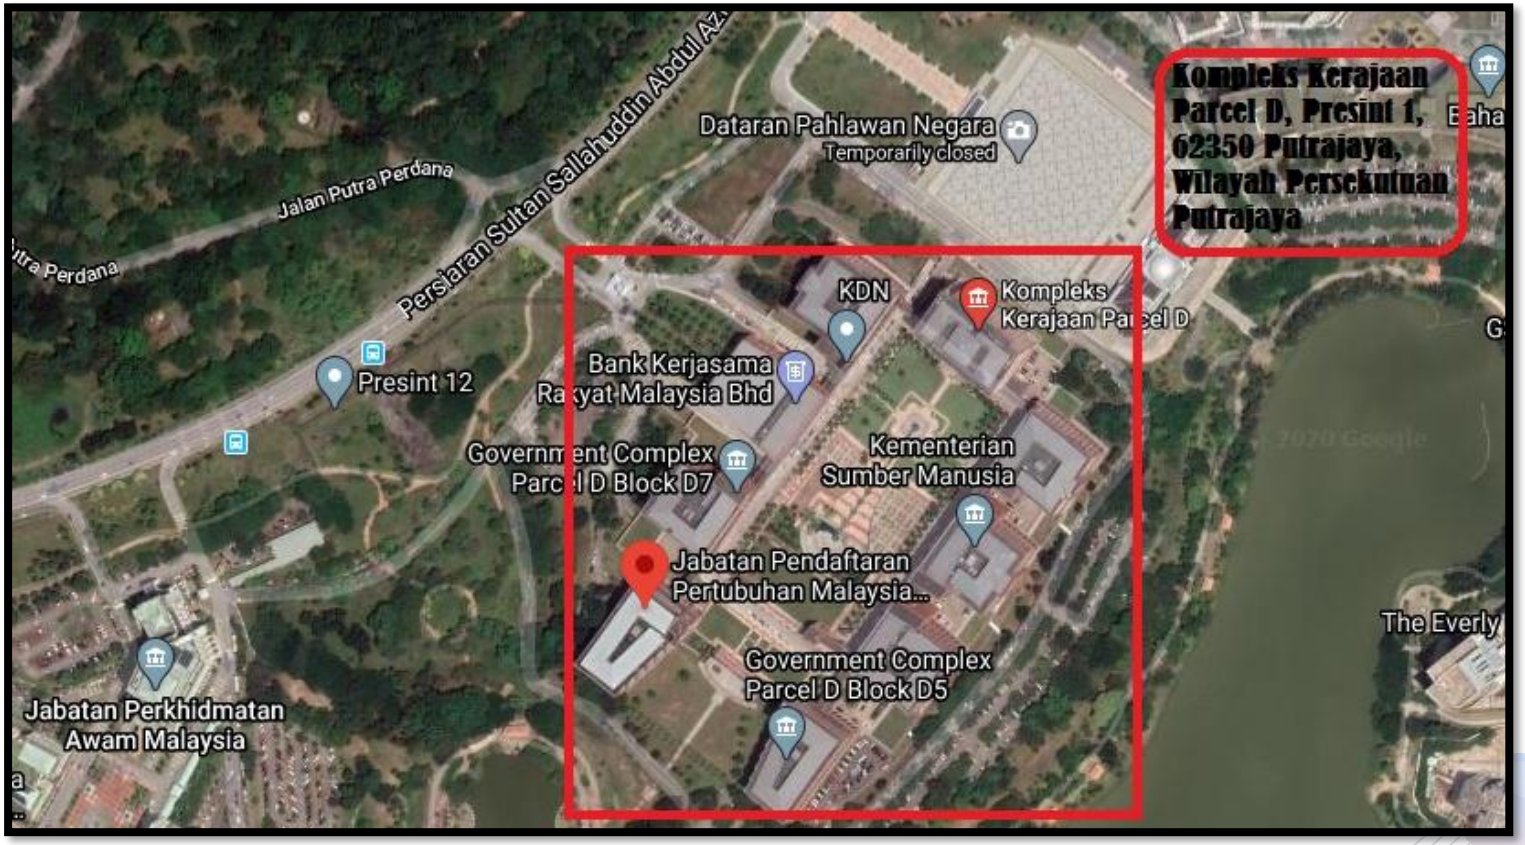

MAKLUMAT BANGUNAN

BLOK	KEMENTERIAN / JABATAN
SP 1	KEMENTERIAN DALAM NEGERI (KDN)
SP 2	KEMENTERIAN DALAM NEGERI (KDN)
SP 3	KEMENTERIAN SUMBER MANUSIA (KSM)
SP 4	KEMENTERIAN SUMBER MANUSIA (KSM)
SP 5	JABATAN PERDANA MENTERI (JPM)
SP 6	KEMENTERIAN DALAM NEGERI (KDN)
SP 7	KEMENTERIAN DALAM NEGERI (KDN)
SP 8	AUDITORIUM
SP 9	KEMENTERIAN DALAM NEGERI (KDN)
SP 10	KEFETERIA / DEWAN SERBAGUNA

TARIKH-TARIKH PENTING SEBUTHARGA

TARIKH MOHON SEBUTHARGA DIBUKA	:	19 Oktober 2026 HINGGA 21 Oktober 2026
MUAT TURUN DOKUMEN DI LAMAN WEB (KONTRAKTOR BERJAYA)	:	PENYEBUTHARGA YANG BERKELAYAKAN AKAN MENERIMA KATA LALUAN DAN PAUTAN UNTUK MEMUAT TURUN DOKUMEN SEBUTHARGA PADA 22 Oktober 2026 HINGGA 28 Oktober 2026
TARIKH TUTUP SEBUTHARGA	:	29 Oktober 2026 JAM : 12.00 TENGAHARI
LOKASI PENGHANTARAN SALINAN CETAK SEBUTHARGA	:	PETI SEBUT HARGA BAHAGIAN KONTRAK DAN UKUR BAHAN, JKR WILAYAH PERSEKUTUAN PUTRAJAYA, ARAS 2, BLOK F7, KOMPLEKS F, PUSAT PENTADBIRAN KERAJAAN PERSEKUTUAN, 62000 PUTRAJAYA

ARAHAN KEPADA PENYEBUTHARGA

- Penyebutharga adalah dianggap telah pun memperolehi maklumat-maklumat secukupnya dan memuaskan untuk tujuan mengemukakan sebarang tawaran harga bagi Sebutharga yang disertai.

- Penyebutharga juga adalah disyorkan untuk menjalankan segala penilaian dan pemerhatian kepada kerja-kerja yang akan diadakan, dilaksanakan dan telah pun memperolehi maklumat-maklumat penting berhubungkait, mencukupi dan memuaskan untuk tujuan mengemukakan sebarang tawaran harga bagi sebutharga yang disertai.

- Harga yang disertakan adalah termasuk segala barang, aksesori keperluan dan keselamatan bagi menyempurnakan kerja berkaitan.

- Penyebutharga digalakkan untuk membuat lawatan tapak bagi mengenalpasti keadaan/kedudukan sebenar di tapak.

SKOP TEKNIKAL & SPESIFIKASI (samb.)

Berikut adalah merupakan skop kerja bagi sebutharga ini :

ELECTRICAL SYSTEM

Supply and install all materials according to the standard specifications JKR (L.S1) Appendix Specification by wiring embedded using PVC cable in galvanized steel conduit / galvanized steel trunking l/d related accessories.

WIRING IN G.I. CONDUIT / HOT DIPPED GALVANISED TRUNKING.(Base on S.O.s instruction) (G.I. conduit used must be minimum size of 20mm dia.)

a) To supply, install and commissioning to use 1 nos 13A socket outlet point using 2 x 4sq.mm Cu. PVC and 1 x 4sq.mm Cu. PVC circuit protective conductor c/w 1 nos 13A 3 pin flush switched socket outlet and related other accessories.

SKOP TEKNIKAL & SPESIFIKASI (samb.)

ELECTRICAL SYSTEM

a) To supply, install and commissioning to use WALL MOUNTED METALCLAD TYPE SUITABLE FOR FRONT ACCESS SUB SWITCH BOARD DEWAN GEMILANG' (SSB 'DG') as per JKR Specifications.

b) To supply, install and commissioning 45 way TPN metalclad DB POWER & Lighting as per JKR Specifications.

c) To supply, install and commissioning 14 way TPN metalclad DB HOUSE & STAGE LIGHTING as per JKR Specifications.

d) To supply, install and commissioning 6 way TPN metalclad DB SOUND SYSTEM as per JKR Specifications.

e) To supply, install and commissioning Isolator 32A c/w selector switch and built-in as per JKR Specification.

SKOP TEKNIKAL & SPESIFIKASI (samb.)

ELECTRICAL SYSTEM

a) To supply and install heavy-duty GI trunking, size 150 mm × 100 mm, complete with cover, couplers, bends, tees, supports, and all necessary accessories.

b) To supply and install heavy-duty Switch Socket Indoor Metal Box 13.2" × 1.5" × 9.5" complete with cover, couplers, bends, tees, supports, and all necessary accessories.

c) To supply and install flush switch 10A 5 Gang 1 Way Switch and related other accessories.

d) To supply and install submain cable 1 x 35sq.mm x 4 Cu. PVC in surface hot dipped galvanised trunking c/w 1 x 35sq.mm Cu. PVC ECC

SKOP TEKNIKAL & SPESIFIKASI (samb.)

MICRPHONE SYSTEM

a) To supply and install Microphone System and accessories with the following features and minimum specifications (Refer in Bill Of Quantities).

b) To supply and install Antenna Distribution System with the following features and minimum specifications (Refer in Bill Of Quantities).

c) To supply and install Passive Directional Antenna with the following features and minimum specifications (Refer in Bill Of Quantities).

d) To supply and install Digital Wireless Headset Microphone System and accessories with the following features and minimum specifications (Refer in Bill Of Quantities).

e) To supply and install Wireless Microphone Charging Set and accessories with the following features and minimum specifications (Refer in Bill Of Quantities).

SKOP TEKNIKAL & SPESIFIKASI (samb.)

CIVIL WORKS

Replacement and Repair Works of the Gemilang Hall Stage

a) Dismantle and take out existing carpet finishes and remove all debris offsite as instructed by the S.O. and making good all affected work to receive new work. (Approximate area: 90 m2)

b) To supply and install new carpet roll with reference to manufacturer's specification and S.O.'s approval and the following specifications (Refer in Bill Of Quantities).

Stage Repair

a) Make good existing surfaces at the stage including repair and restore current surface imperfections damage or unevenness which includes but not limited to :
   i) Varnish all wood surface with 2 layers related to the stage.
   ii) Filling cracks, patching holes and levelling uneven areas with appropriate materials.
   All in accordance with specification and S.O.'s approval.

SKOP TEKNIKAL & SPESIFIKASI (samb.)

CIVIL WORKS

Stage Repair

a) Supply, repair and install the existing speaker box (2 nos) permanently covered with 45mm thk plywood with the size as per site and other wood support including necessary carpentry works

b) To provide a space to receive 2 sets of Subwoofers under the stage with 2 set of rectangular openings in front of the stage with suitable sizing by cutting the existing wood panel with suitable machinery and repair any wood panel damaged. All in accordance with specification and S.O.'s approval.

SKOP TEKNIKAL & SPESIFIKASI (samb.)

CIVIL WORKS

Ceiling Repair Works at Dewan Gemilang

a) To supply and install 12mm thk. plastered ceiling complete ceiling batten framing system (if necessary) with other accessories and including 2 layer finishing coat. All in accordance with specification and S.O.'s approval.(Refer in Bill Of Quantities).
    i. Infront the stage
    ii. Audio System Room

b) Projector Removal And Scissor Lift Works Including Existing Wiring Including Related Works.


SKOP TEKNIKAL & SPESIFIKASI (samb.)

a) Tempoh Siap Kerja

Tempoh siap kerja bagi sebutharga ini adalah tidak melebihi **EMPAT BELAS (14) MINGGU**

SKOP TEKNIKAL & SPESIFIKASI (samb.)


Gambar-gambar lokasi yang terlibat :

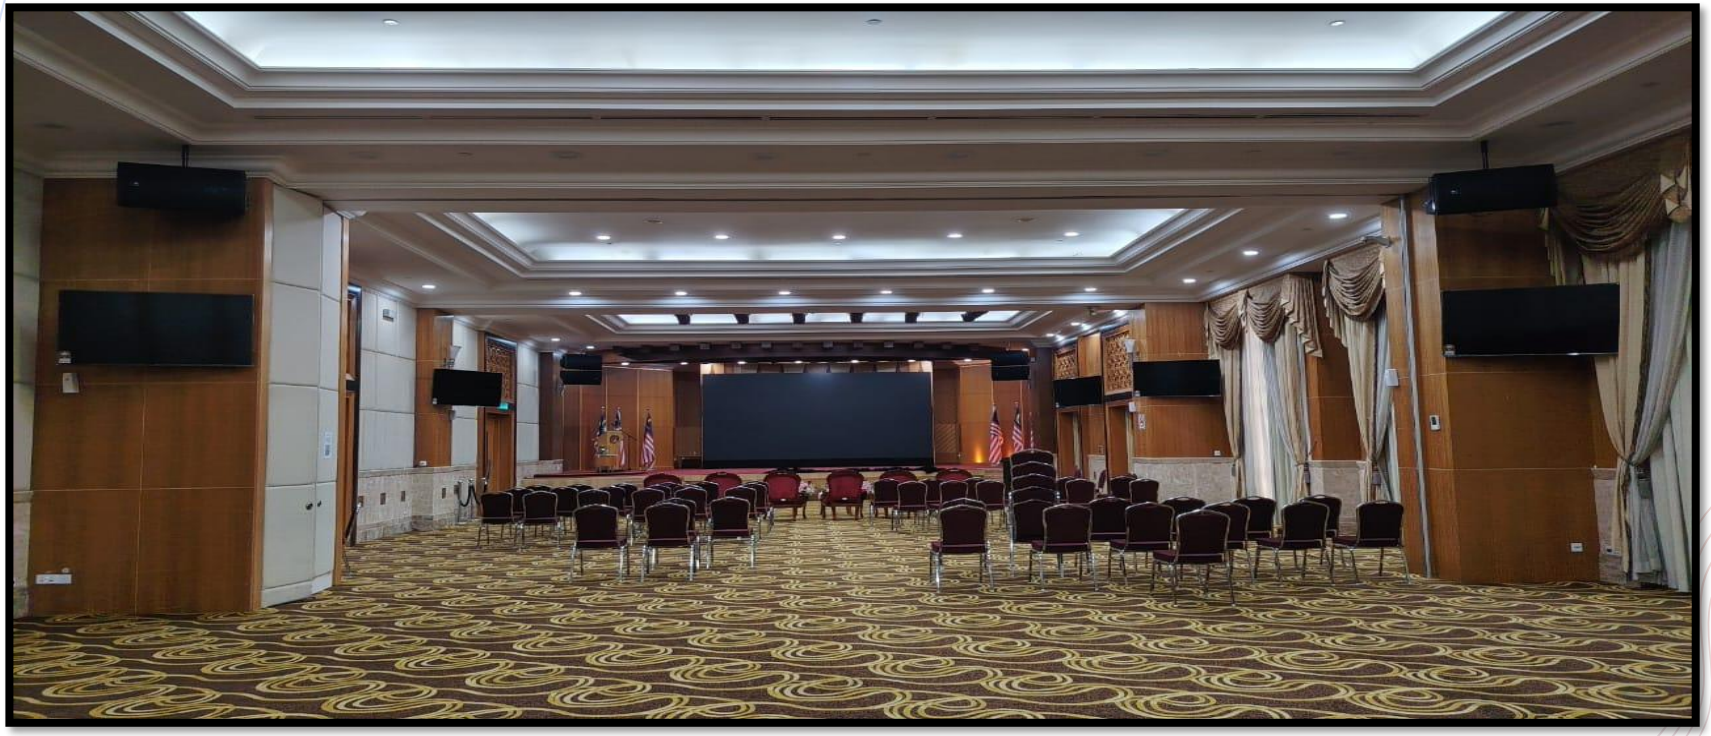

DEWAN GEMILANG, ARAS G, BLOK SP 1,
KOMPLEKS SETIA PERKASA.

SKOP TEKNIKAL & SPESIFIKASI (samb.)

Gambar-gambar lokasi yang terlibat :

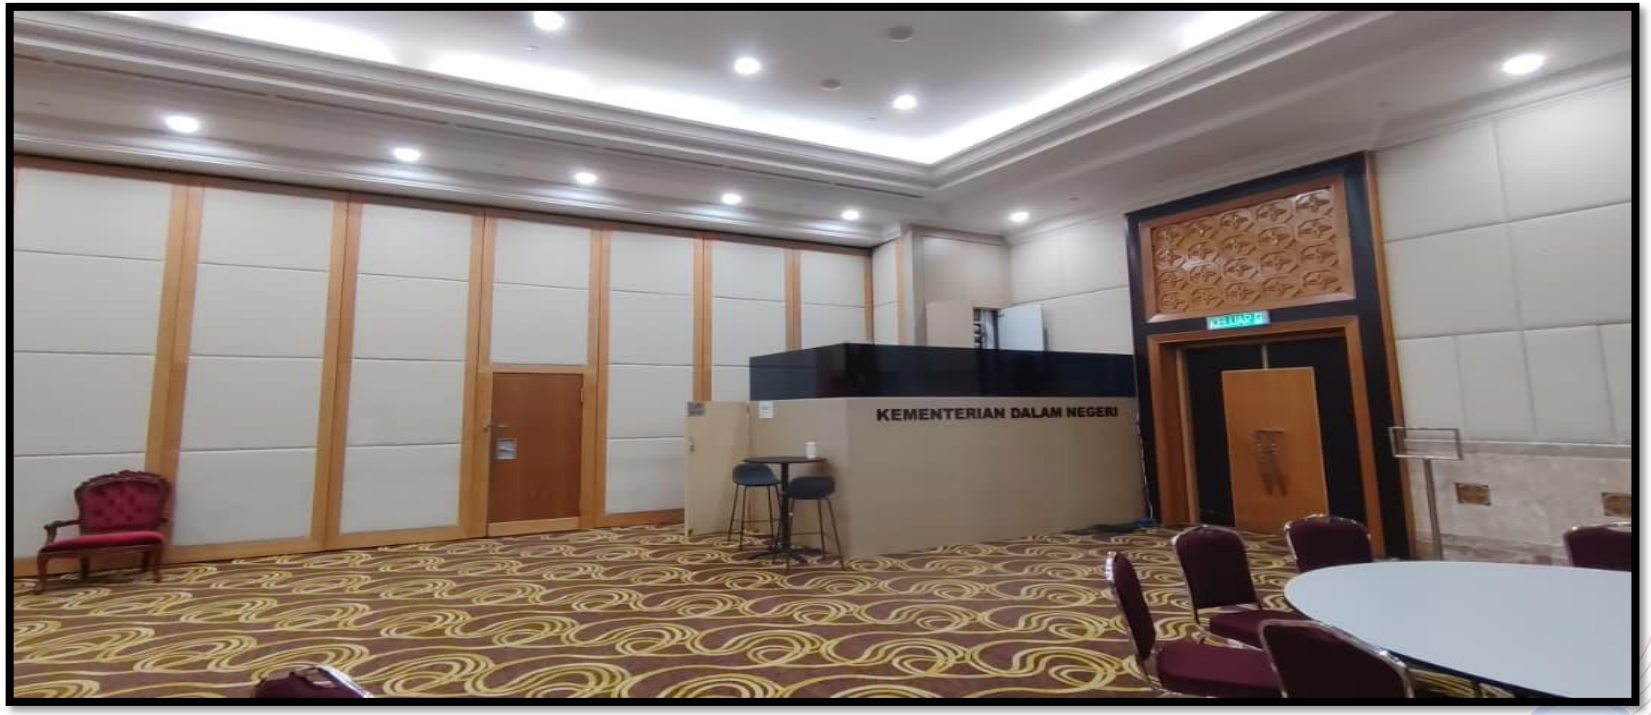

AV Control Room Dewan Gemilang

SKOP TEKNIKAL & SPESIFIKASI (samb.)

Gambar-gambar lokasi yang terlibat :



***Sub Main Distribution Board*, belakang stage Dewan Gemilang**

SKOP TEKNIKAL & SPESIFIKASI (samb.)

Gambar-gambar lokasi yang terlibat :



LOKASI *Distribution Board (DB)* didalam *AV Control Room,* Dewan Gemilang

Terima kasih

JIKA TERDAPAT SEBARANG PERTANYAAN,
SILA HUBUNGI KAMI DI

nurwahida@jkr.gov.my
amirulanuar@jkr.gov.my